




• Aeration for sewage treatment systems

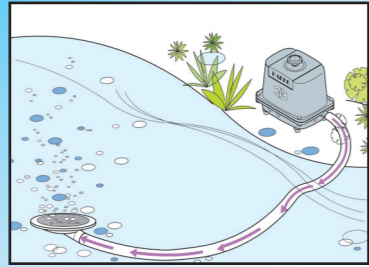

• Aeration for water garden pond

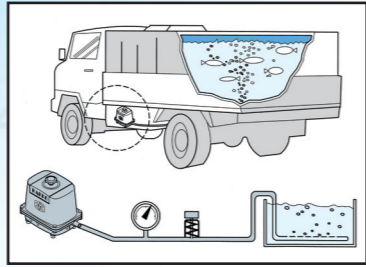

• Aeration for fish Transport

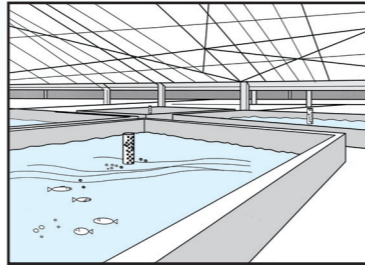

• Aeration for Aquaculture

HAKKO Linear Diaphragm Air Pumps

SPECIFICATION

Model	HK-25	HK-40	HK-60	HK-80	HK-100	HK-120	
Rated Voltage (V)	AC 115 (AC 110/115/120 or AC 220/230/240)						
Power supply frequency (Hz)	50 / 60						
Rated pressure (bar (psi))	0.10 (1.42psi)	0.13 (1.85psi)	0.15 (2.13psi)		0.18 (2.56psi)	0.20 (2.85psi)	
Rated performance (lpm (cfm))	25 (0.90cfm)	51 (1.80cfm)	68 (2.40cfm)	86 (3.04cfm)	105 (4.17cfm)	121 (4.67cfm)	
Power (w)	17	40	63	85	116	126	
Noise level (dB)	32	35	38	38	40	42	
Closed pressure	bar	0.34	0.38	0.46	0.54	0.45	0.54
	psi	5.0	5.5	6.7	7.8	6.5	7.8
weight (kg (lb))	2.9 (6.27lb)	5.4 (11.9lb)	6.3 (13.8lb)	6.3 (13.8lb)	8.9 (19.6lb)	8.9 (19.6lb)	

•The above specifications are subject to change without prior notice.

DISTRIBUTED BY



Matala®
Make water alive

HAKKO

Linear Diaphragm Air Pumps

BENEFITS:

- High Efficiency
- Simple Maintenance
- Completely Oil-Free
- Overload Protection
- Silent Operation
- Long Life Expectancy

